




# 轻型卧式多级离心泵

## Light horizontal multistage centrifugal pump

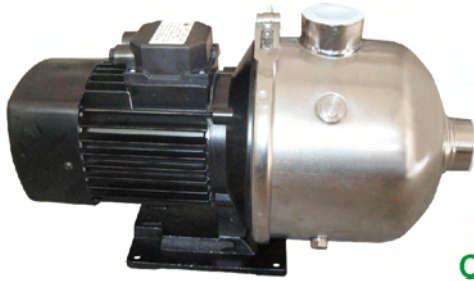


**CMF16**

### 性能曲线 Performance curves

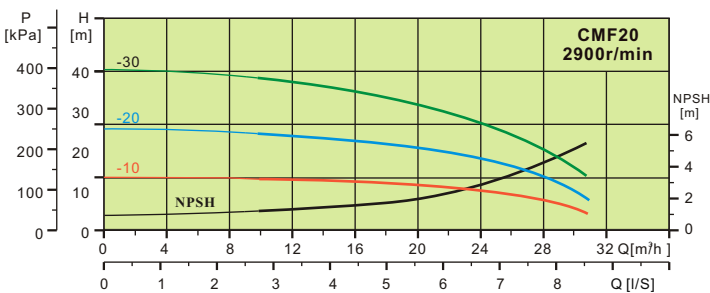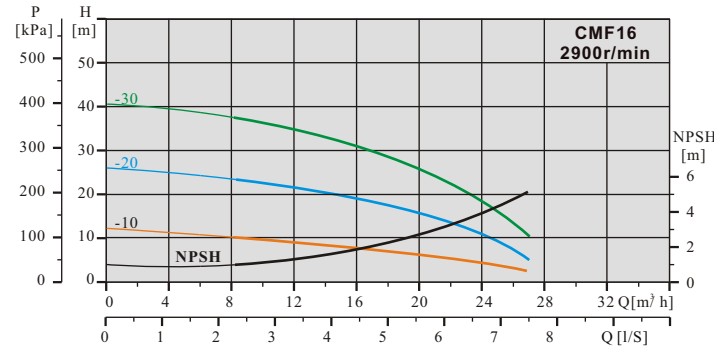

### 安装结构图 Installation Structure

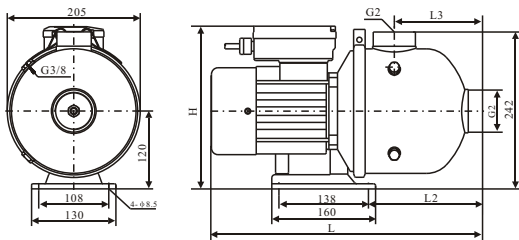

泵型号 MODEL	配套 功率 P <sub>2</sub> (kW)	尺寸/Size(mm)								重量 Weight (kg)
		单相 Single-phase				三相 three-phase				
		L	L2	L3	H	L	L2	L3	H	
CMF16-10(T)	1.0	452	175	136	254	452	175	136	228	13.5
CMF16-20(T)	1.50	452	175	136	254	452	175	136	228	17
CMF16-30(T)	2.20	520	201	162	261	520	201	162	235	23
CMF20-10(T)	1.0	420	175	136	244	420	175	136	218	20
CMF20-20(T)	1.85	494	175	136	261	452	175	136	228	22
CMF20-30T	3.0					520	201	162	235	25

220V/60Hz, 110V/60Hz models are available on request

### 电机

2极异步电动机;  
三相: 380~415V / 50Hz  
单相: 220~240V / 50Hz  
单相电机安装热保护器;  
绝缘等级: B级或F级  
防护等级: IPX5  
工作方式: 连续

### Motor

2-pole induction motor;  
three-phase: 380~415V/50Hz  
Single-phase: 220~240V/50Hz  
Single-phase with thermal protector  
Insulation class: B or F  
Protection: IPX5  
Continuous duty

### 适用范围

主要用于工业液体的传输, 如矿泉水、软化水、纯水、轻油和其它轻化工介质的循环和增压。

- 水处理
- 工业清洗机和洗碟机
- 流程水增压、花园喷灌
- 工业流程水的供热和冷却
- 空调系统
- 空气清新、加湿设备(软水)
- 供水和增压(饮用水, 及轻微含氯水)
- 施肥、计量系统

### Application:

It's widely used to convey industrial liquid: such as mineral water、soft water、pure water、light oil、circulation and boosting for other weak chemical liquid.

- Water treatment
- Industrial cleaner and dishwasher
- Pressure boosting for the water on processing line, garden sprinkler
- Heating and cooling for the water on industrial process-ing line
- Air-conditioning system
- Air freshening, moistening equipment (soft water)
- Water supply and boosting(drinking water、weak chlorine water)
- Fertilization/metering system

### 运行条件

稀薄、干净、非易燃易爆并且不含固体颗粒或纤维的液体;

液体温度: 常温型 -20℃至70℃  
热水型小于105℃

最高环境温度: +50℃

最大运行压力: 10 bar

最大进口压力受最大运行压力限制

### Working conditions:

Thin, clean, non-flammable and non-explosive liquid containing no solid granules and fibers;

Liquid temperature: Standard model

-20℃~70℃, Hotwater less than 105℃;

Max. environmental temperature: +50℃

Max. operating pressure: 10 bar

Max. suction pressure is limited by max. operating pressure.

# 广东凌霄牌水泵

GUANGDONG LINGXIAO WATER PUMP

Http://www.lingxiao.com.cn